

Paging Horn Speaker

HS-50/40RT



FEATURES

- ❖ Excellent intelligibility & Loudness, High directivity, Good reliability.
- ❖ Adjust direction : Vertical 240°, Horizontal 160°.
- ❖ Units are commonly installed in commercial buildings, distribution centers, factories, schools, public areas, civic centers and recreational facilities.

SPECIFICATIONS

Spec	Model	Unit	HS-50	HS-40RT
Rated Input		W	50	40
Impedance		Ω	200, 400	250, 500
Frequency Response		Hz	380 ~ 6.5k	380 ~ 6.5k
SPL (1W/m)		dB	109	109
Operating Temperature, Dust and Humidity		°C	-10 ~ +50	-10 ~ +50
Weight		kg	3.1	2.95
		lb	6.8	6.5
Dimensions (W×H×D)		mm	ϕ 320x350	320x210x365
		inches	ϕ 12.6x13.7	12.6x8.2x14.3

* Specifications and design are subject to change without notice.


PAGING HORN SPEAKER

HS-50/40RT




Polar Pattern Diagram

▶ HS-50

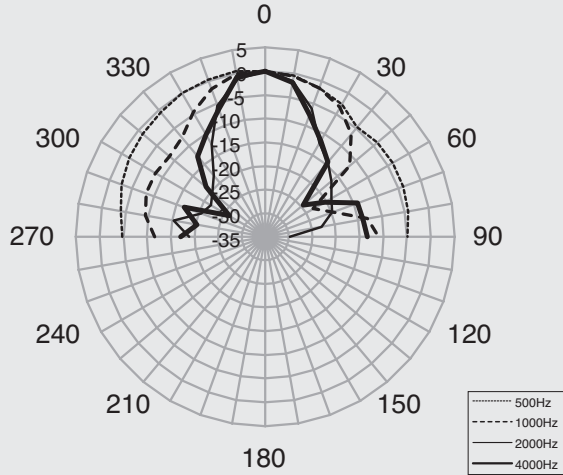


▶ HS-40RT

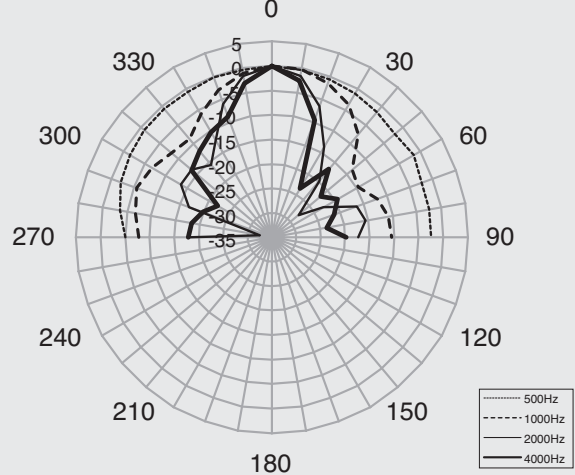


Frequency Response

▶ HS-50 SPL DATA

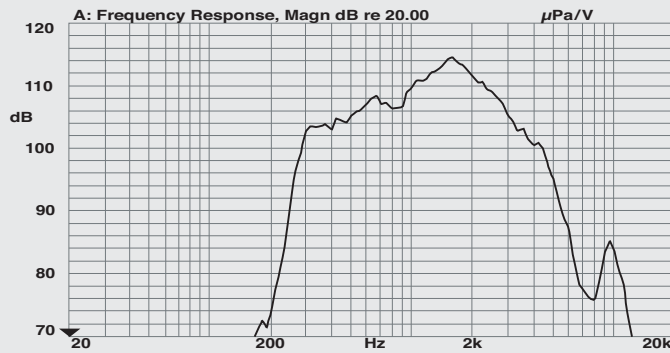

▶ HS-40RT SPL DATA

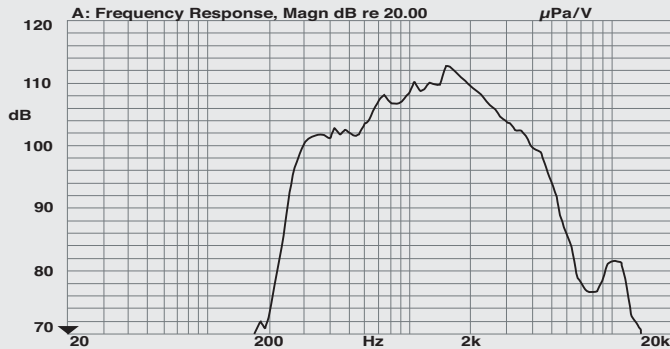

Inter-M Corporation

- Office : 719, DOBONG-RO, DOBONG-GU, SEOUL, KOREA
 - Tel : +82-2-2289-8140~8, Fax : +82-2-2289-8149
 - Home page: <http://www.inter-m.com>, E-mail: overseas@inter-m.com

Inter-M Corp. (IMA)

- Office : 5666 CORPORATE AVE. CYPRESS, CA 90630
 - Tel : +1-714-828-2200, Fax : +1-714-828-2210
 - Home Page : <http://www.inter-m.net>, E-mail : info@inter-m.net