

Program Distributor

# PO-6106



# Program Distributor

# PO-6106



- **EASY TO OPERATE**
  - Distributes a single channel input to six outputs.
- **EASY LEVEL ADJUSTMENT**
  - Front-panel input and output level adjustment.
- **INPUT MONITORING**
  - Input peak LED monitoring.

# FRONT/REAR PANEL



- 1 INPUT PEAK INDICATOR
- 2 OUTPUT INDICATORS
- 3 POWER INDICATOR


- 4 INPUT LEVEL CONTROL
- 5 OUTPUT LEVEL CONTROL
- 6 POWER SWITCH




- 1 LINE INPUT
- 2 LINE OUTPUTS 1-6

- 3 AC POWER INPUT
- 4 DC POWER INPUT

# APPLICATIONS

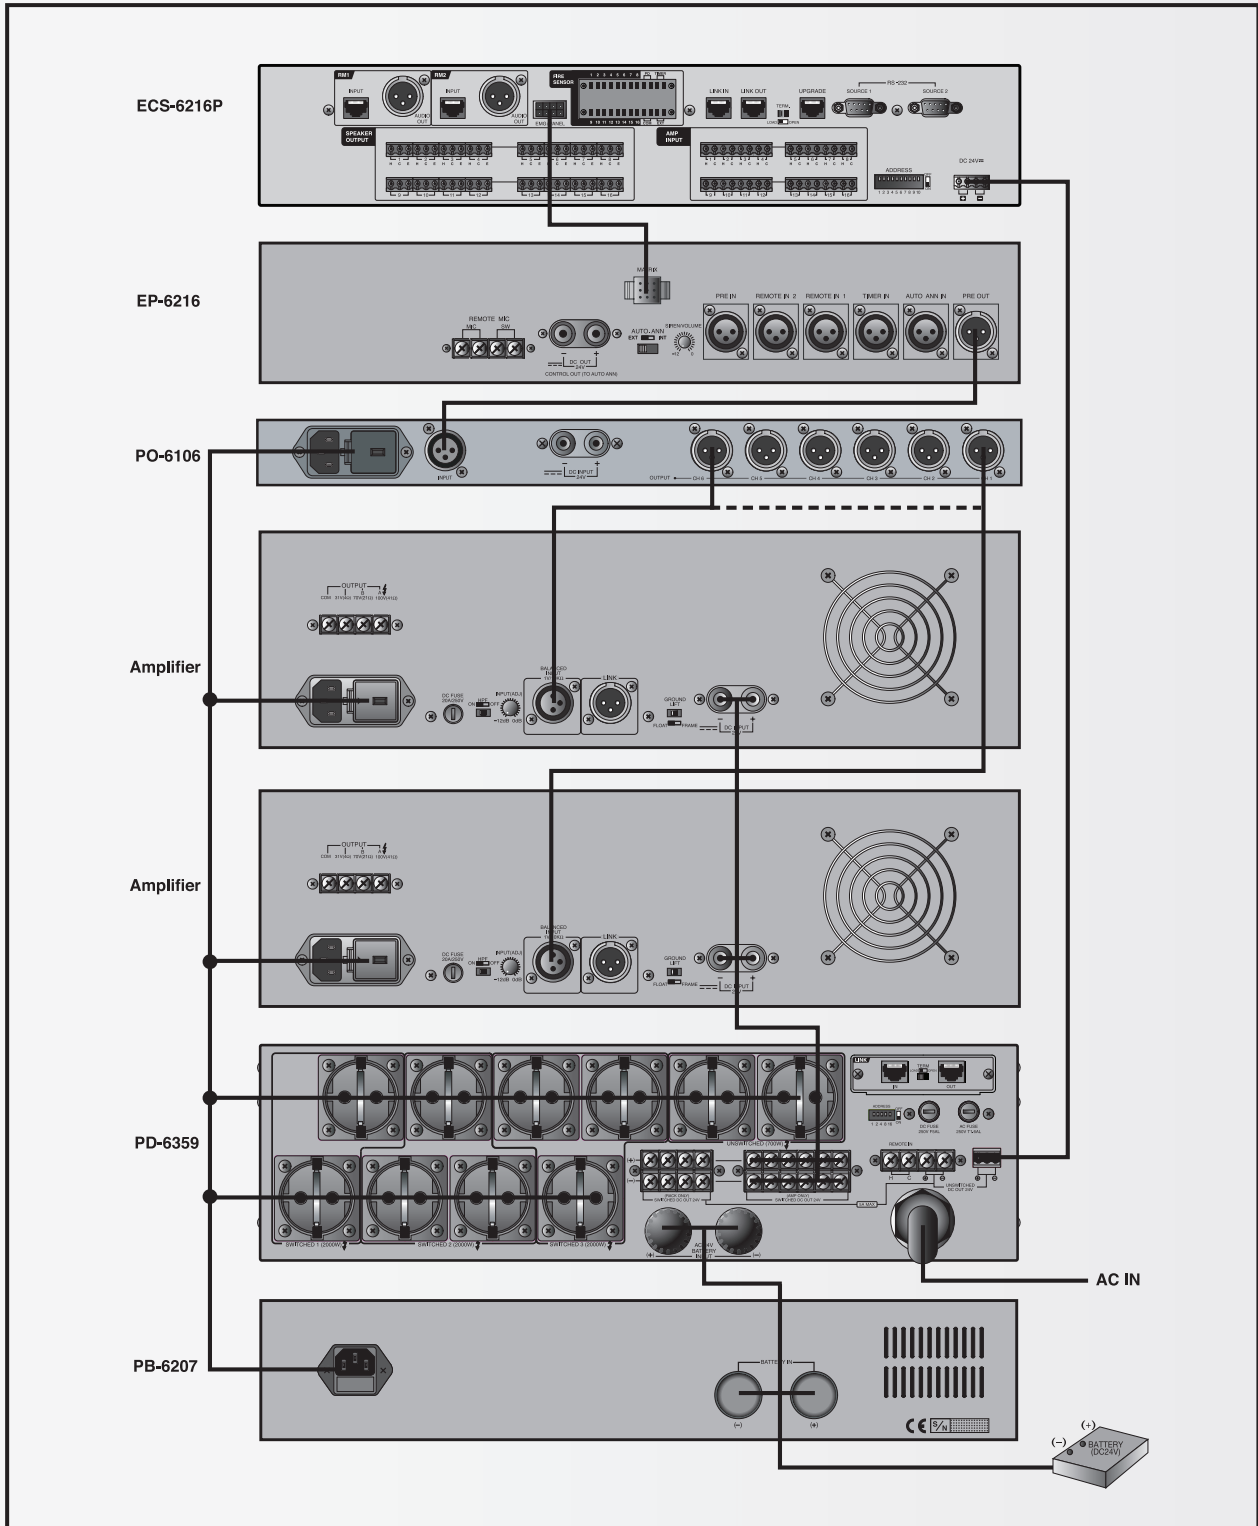


# BLOCK DIAGRAM

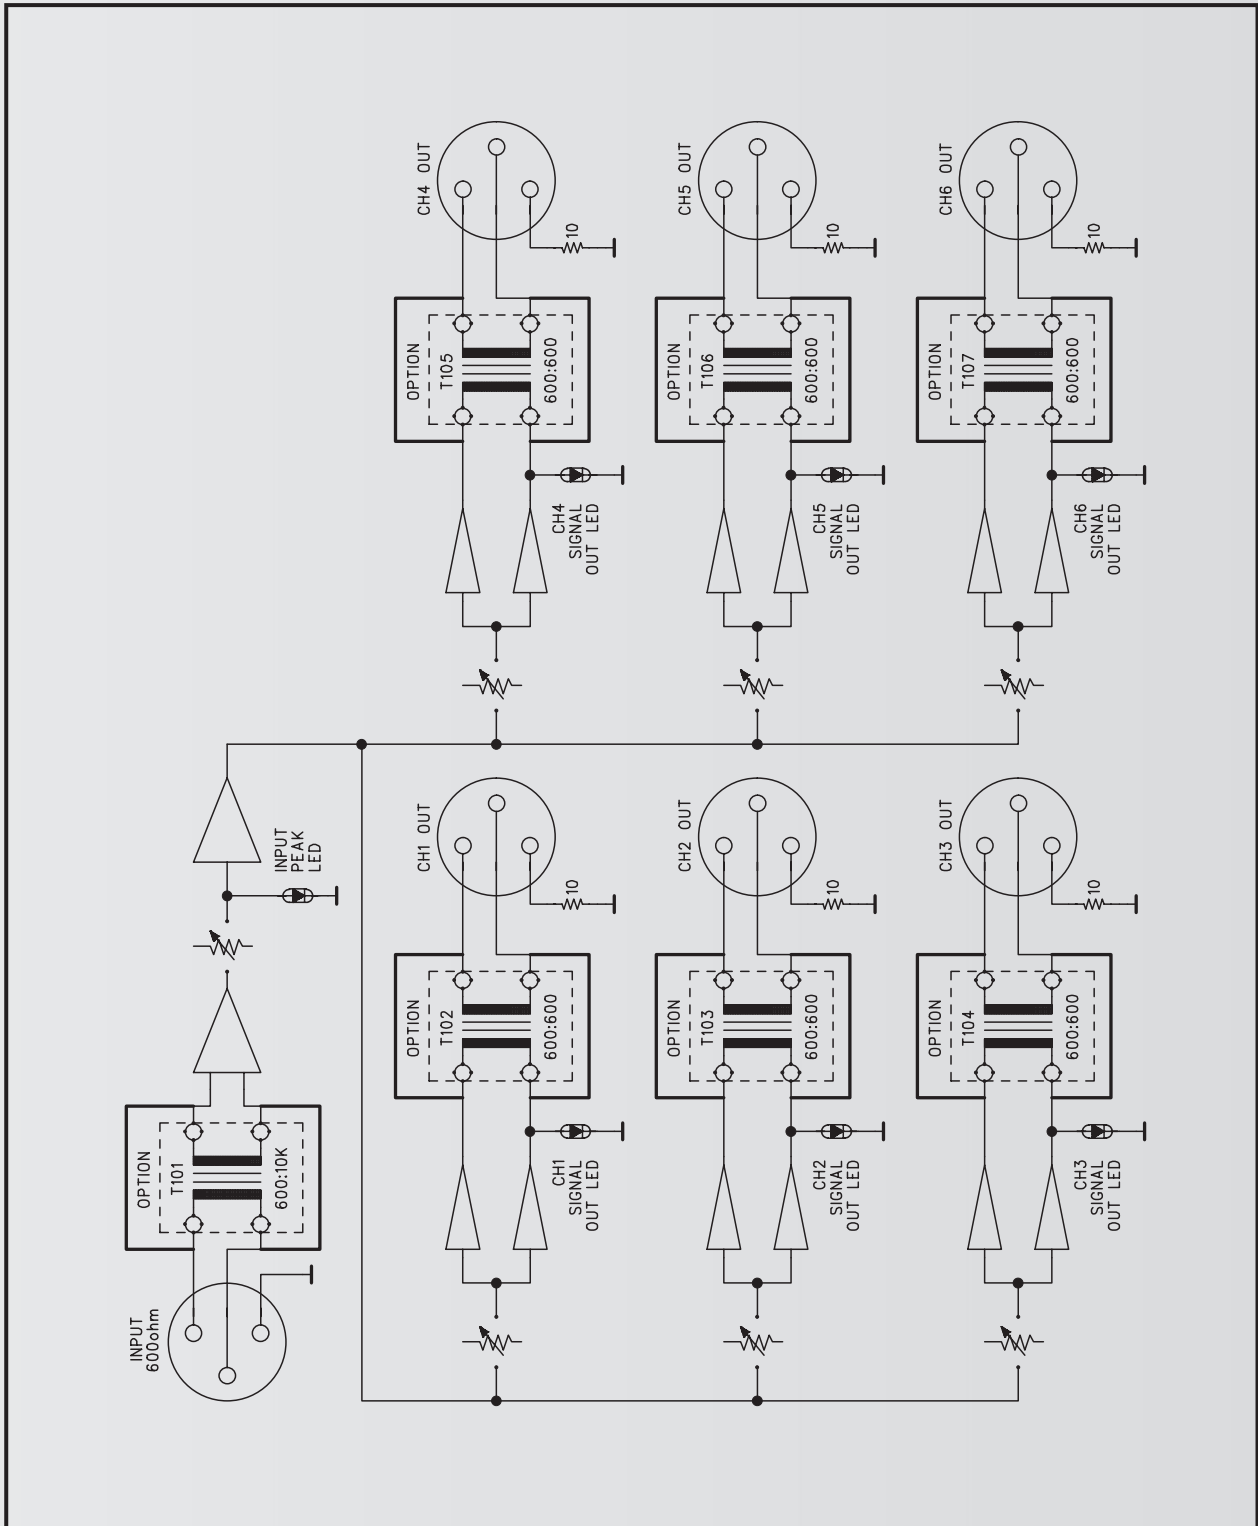

## SPECIFICATIONS

	<b>PO-6106</b>
Channels	1 Input, 6 Outputs
Frequency Response	20Hz-20kHz ( $\pm 3$ dB)
T.H.D at 1kHz, Rated Output	Less than 0.1%
Input Sensitivity/Impedance	3V $\pm$ 0.5V Balanced
Output Level/Impedance	1V $\pm$ 0.2V Balanced
S/N	Better than -95dB
Operation Temperature	-10°C ~ +40°C / 14°F ~ 104°F
Power Source	100–120VAC or 220–240VAC; 50/60Hz, DC 24V (Supplied AC main transformer depends on country requirements)
Power Consumption	8W
Weight (SET)	4kg/8.8lb
Dimensions (SET)	482(W)xx44(H)x280(D)mm/19(W)x1.7(H)x11(D)in

# DIMENSIONS

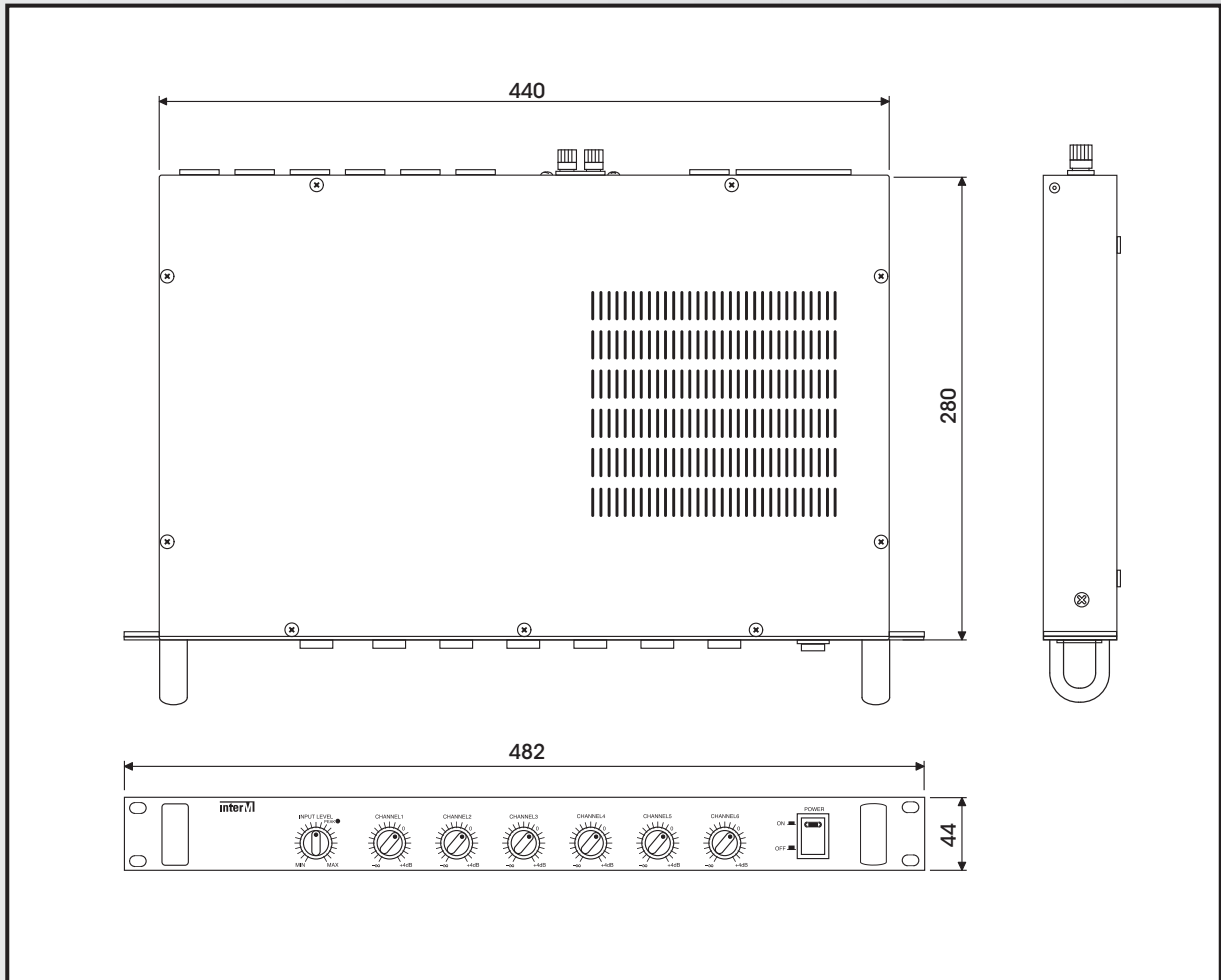



**Inter-M Corp. (IMK)**

719, Dobong-ro, Dobong-gu, Seoul, Korea  
Overseas Sales Team

Tel\_ +82-2-2289-8141~7 Fax\_ +82-2-2289-8149 E-mail\_ overseas@inter-m.com

[www.inter-m.com](http://www.inter-m.com)