

System Remote MIC Station/Keypad

RM-6024/6012KP



System Remote MIC Station/ 12Key MIC Station Keypad

RM-6024 RM-6012KP

RM-6024 is remote microphone for activating Mic, Chime and BGM by controlling a 6000 SYSTEM from a distance.

RM-6012KP is key pad expansion unit for RM-6024.



- **24 CONTROL KEY**

- 24 different zone can be controlled with 24 control key.

- **KEY PAD EXPANSION**

- The control key can be expanded up to 48 keys with RM-6012KP.

- **ZONE MACRO FUNCTION**

- Many different zone can be set as a single button to operate through PC window program.

- **ALL BUTTON**

- All button for selecting entire broadcasting zone.

- **MIC BROADCASTING**

- High spec condensing mic for high quality sound announcement.

- **CHIME BROADCASTING**

- Chime notification before and after broadcasting.

- **AUX INPUT**

- Route for external sound source to broadcasting.

- **OUTPUT LEVEL LED**

- Monitoring a output signal level with LED level meter.

- **BROADCASTING STATUS DISPLAY**

- It shows the remote amp status with power, communication fault and priority broadcasting.

- **LABEL**

- Label for distinguishable broadcasting area.


- **CAT5 CABLE**

- Single Cat5.e line delivers both audio and data which enable to accomplish a easy installation and maintenance.

- **VOLUME CONTROL**

- Adjusting individual volume of MIC/CHIME/AUX.

FRONT/REAR PANEL

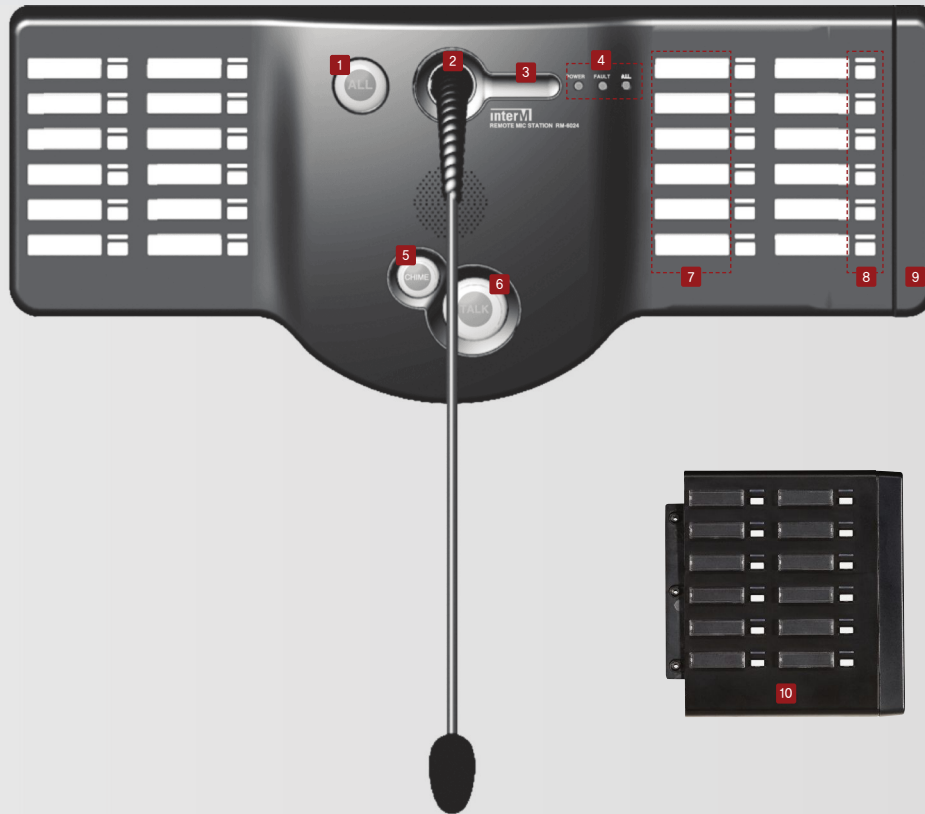

- | | |
|------------------------|--------------------------------|
| 1 ALL BUTTON | 6 TALK ON/OFF BUTTON |
| 2 MIC | 7 ZONE DISPLAY LED AND LABEL |
| 3 OUTPUT LEVEL LED | 8 ZONE SELECTION BUTTON |
| 4 POWER/FAULT/BUSY LED | 9 SIDE PAD |
| 5 CHIME BUTTON | 10 EXPANSION KEYPAD(RM-6012KP) |




- | | |
|---------------------------------|------------------------|
| 1 DC INPUT TERMINAL | 4 MIC/AUX/CHIME VOLUME |
| 2 ADDRESS SWITCH | 5 AUX INPUT TERMINAL |
| 3 DATA & AUDIO TERMINAL (RJ-45) | |

System Remote MIC Station/ 12Key MIC Station Keypad RM-6024/6012KP

SPECIFICATIONS

		RM-6024/6012KP
Channel		24CH
Communication Protocol		RS-422(Maximum 1km /3,280 feet)
Audio		
MIC	INPUT SENSITIVITY	-60 dB
	THD+N	Less than 0.5 %
	FREQUENCY RESPONSE	120 Hz~20 kHz
	S/N	Better than 50 dB
AUX	INPUT SENSITIVITY	-10 dB
	THD+N	Less than 0.5 %
	FREQUENCY RESPONSE	120 Hz~20 kHz
	S/N	Better than 60 dB
Operation Temperature		-10 °C ~ +40 °C/14 °F ~ 104 °F
Power Source		DC 24V
Weight(Set)	RM-6024	1.2 kg/2.6 lbs
	RM-6024KP	250 g/0.55 lbs
Dimensions (Set)	RM-6024	456(W)×65(H)×200(D) mm/17.9(W)×2.5(H)×7.9(D) in
	RM-6024KP	137(W)×54(H)×155(D) mm/5.3(W)×2.1(H)×6.1(D) in

※ Specifications and design are subject to change without notice.

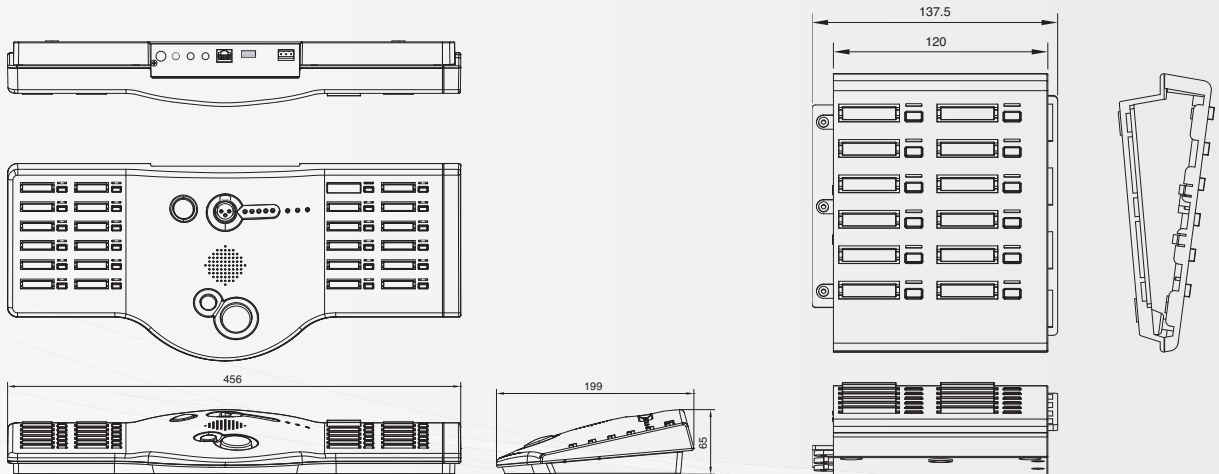



Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team

Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.com