

# Wall Speaker

# SWS-03/03A/10/10A(I/B)

SWS series is providing a natural and smooth sound with a variety of It fits to any places that announcements and BGM required such as schools, government office, hotels and etc. And it ensures the quality and durability by acquiring KS certification in the Korea's first.



## FEATURES

- High quality speaker driver produce detail and rich sound
- Stylish and sleek design wall speaker
- Harmonized with general structure when installed
- Sound volume adjustable with attenuator (SWS-03A/10A)

## SPECIFICATION


Model	SWS-03/03A		SWS-10/10A	
Type	6.5" Full-range Wall Speaker			
Unit	6.5"			
Power Handling(AES)	3W		10W	
Input Power	100V	3/2/1W	10/5/3W	
	70V	-	-	
Impedance	100V	3.3k/5k/10kΩ	1k/2k/3.3kΩ	
	70V	-	-	
	LOW	-	-	
Power Selection	Rotary Switch (A Ver.)			
Frequency Response (-10dB)	200Hz ~ 14kHz		160Hz ~ 10kHz	
Sensitivity (1W/1m 300,400,500,600Hz avg.)	93dB		91dB	
Maximum SPL	97dB		101dB	
Norminal Dispersion (HxV)	120° x 110°		120° x 150°	
Input Connector	4P Screw Terminal			
Enclosure Material	HIPS			
Enclosure Color	Black/Ivory			
Grill Material	Jersey			
Grill Color	Black/Ivory			
Weights (Net)	1.1kg		1.34kg	
Dimension (Net, WxHxD, mm)	182 x 274 x 120			
Weather Resistant	-			
Flame Resistant	-			
Certification	-			
Included Accessories	Anchor bolt x 1			

# SWS-03/03A/10/10A(I/B)

Wall  
Speaker


## TECHNICAL DATA

### DIMENSION

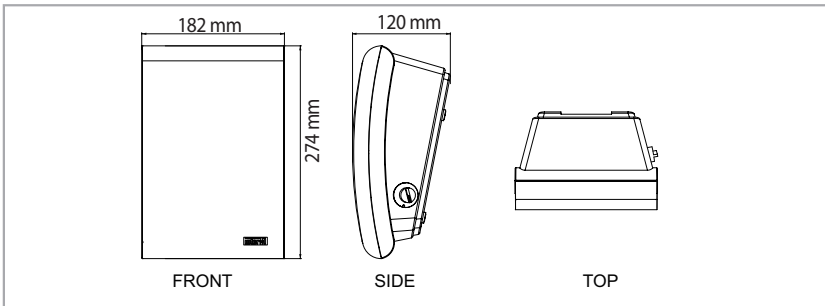


### FREQUENCY RANGE

- SWS-03/03A

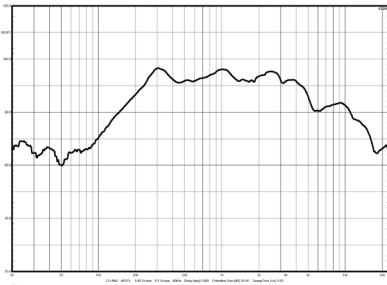


### POLAR PATTERN (1kHz)

Horizontal




Vertical

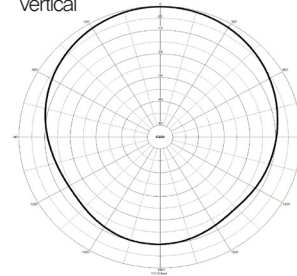


### POLAR PATTERN


- SWS-10/10A

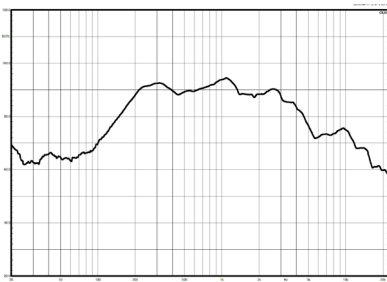

Horizontal

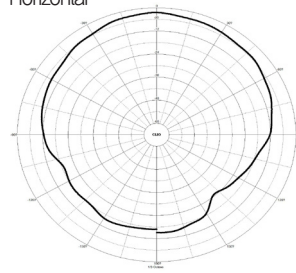

Vertical

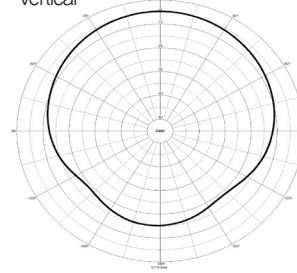

### SPEAKER INSTALLATION GUIDE

