



E308

CEILING MICROPHONE WITH INTER-CHANGEABLE CAPSULES

Description

The E308 is a low profile miniature condenser ceiling microphone. It can be fixed on the rotating steel holding spring and suspended from the ceiling or in a high position sweet spot to pick up the sound of a choir or orchestra.

It offers 3 inter-changeable capsules to meet different applications. It has a 10-meter microphone cable with TA3F connector between the capsule and power adapter.

Features

- Inter-changeable 3 capsules to meet different applications

U : indicates cardioid capsule


H : indicates supercardioid capsule

O : indicates omni capsule



- Inconspicuous ceiling installation

E308 Frequency Response (Cardioid / Supercardioid / Omni)

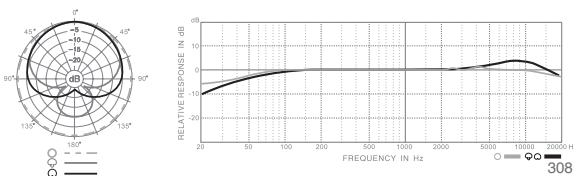

Specifications

Types	Condenser Back Electret, Ø16 mm (Ø0.63")
Polar Pattern	Cardioid / Supercardioid / Omni
Frequency Response	20 - 18,000 Hz
Sensitivity	-44 dBV/Pa (6.3 mV)
Output Impedance	500 Ω
Min. Load Impedance	1,000 Ω
S/N Ratio	76 dB
Equivalent Output Noise	18 dB
Max. SPL	138 dB SPL
Dynamic Range	120 dB
Power Requirements	Phantom 12 - 52V DC, 4 mA
Finish	Black / White
Connector	TA3F
Dimensions	Capsule: Ø20 mm (Ø0.79") Cable: 10 m (32.8')
Net Weight	300 g (10.6 oz)

Included

