




L4.8X

TYPICAL OUTDOOR SOLUTIONS


DIVERSIFIED CABINET SIZE

- Diversified cabinet size to meet the needs of different scenarios, providing a 500x500mm, 500x750mm, 500x1000mm, 250x1000mm cabinet option.

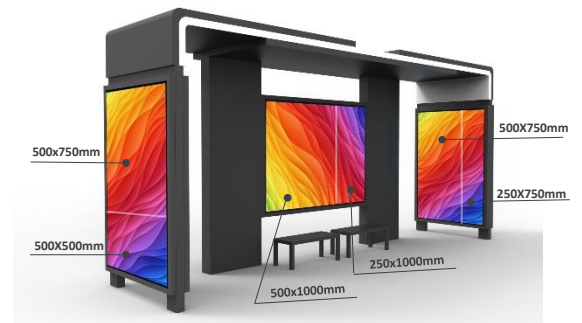


WATERPROOF MODULE

-Waterproof module,
reducing the risk of water ingress into the module
Fully enclosed structure of module
Independent waterproof design
Safe and reliable under all conditions

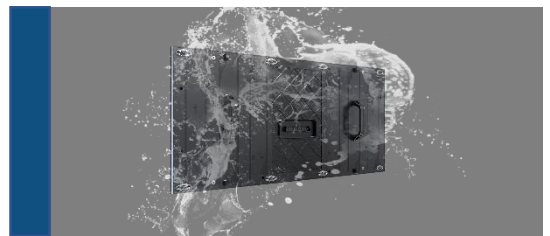


OPTIONAL MAINTENANCE TOOL

- Hexagon screwdriver or handheld screwdriver are optional to lock or dismantled the module.

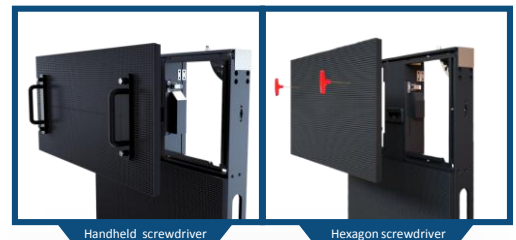

Smooth round corner

Seamless and smooth round corner for cube project

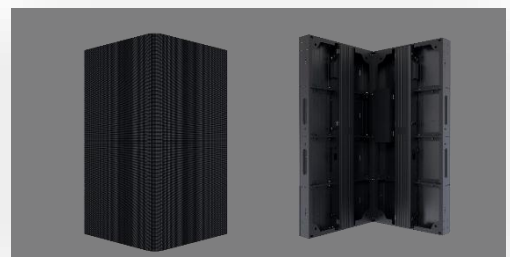

Parameter	Value
Pixel Configuration	SMD1921
Pixel Pitch (mm)	4.8
Pixel matrix per panel	104x104/156/208
Pixel density (pixels/sq.m.)	43264
Cabinet Dimensions (WxHxD)/ (mm)	500x500/750/1000x90
Module Dimensions (WxH)/ (mm)	500x250
Panel material	Aluminum profil
Cabinet weight (kg/panel)	9/13/16
Module weight (kg/panel)	1.57
Color Grayscale (Bit)	14
Gray Scale per Color (level)	16384
Refresh Rate (Hz)	3840
Driving Type	1/9
Signal Transmission Distance (m)	CAT5 cable: < 100 m;Single mode fiber: < 10 km
Brightness (nits)	5000/5500
Optimal Horizontal Viewing Angle (°)	150
Optimal Vertical Viewing Angle (°)	Up 40/down 55
Contrast ratio	7682:1
AC Input Voltage (V)	AC: 100V ~ 240V
AC Input Power Maximum Value (W/m ²)	715
AC Input Power Typical Value (W/m ²)	238
Storage Temperature (°C)	-40-60
Working Temperature (°C)	-30-50
IP rating (Front/Rear)	IP65/IP54
Storage Humidity (RH)	10%~90% non-condensing
Working Humidity (RH)	10%~90% non-condensing
Lifetime Typical Value (hrs)	100000
Cabinet installation	fix
Certifications	CE、CB、ETL、FCC、EN13501、ROHS2.0、IEC62471
warranty	2 years standard product warranty

2·Application

- Wide applications;
- Ultra HD and super thin,
- Various sizes can be customized.

AIRPORTS , Public institution
Integrated public services
Commercial integrated mall



LED DISPLAY
BY SHENZHEN SZLAMP CO., LTD.

Last updated: 28 July 2021

Technical specifications are subject to change without prior notice, please check www.szlamp.net for the latest information