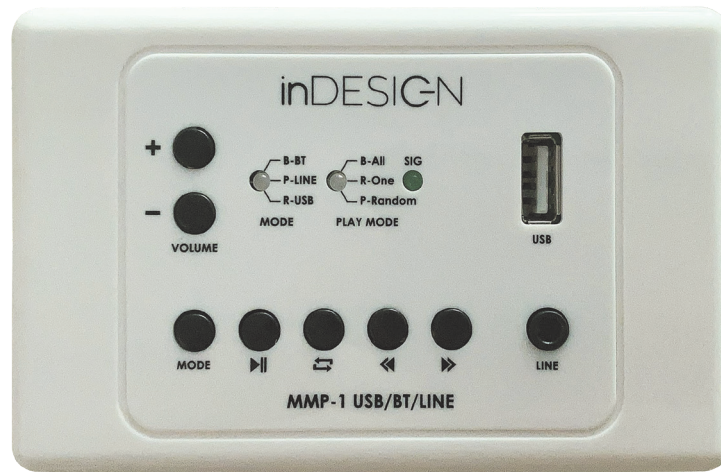## MMP-1 USB/BT/Line Control Panel



The MMP-1 is a universal remote wall panel featuring three input modes: BT, Line input and USB audio file playback. It can used as a remote input to distributed audio systems, or on its own connected directly to mixers, amplifiers or speaker systems. Users have the choice to connect the MMP-1 locally in an installed space or connect to devices remotely via inexpensive CAT6A twisted pair cabling.

The MMP-1 is the right choice for users who wish to install multiple streaming receivers within close vicinity to one another. With a few simple steps, users are able to rename the BT ID to differentiate installed MMP-1's throughout buildings such as schools, universities, office spaces and other training facilities.

| MODEL | MMP-1 |
|---|---|
| Product Mounting | Compatible with Clipsal 2000 series mounting accessories |
| AC Power Supply to PoE | AC 100-240V 50/60Hz |
| MMP-1 Power Supply DC | PoE 24VDC 1.0A |
| BT Revision | BT 4.2 |
| BT Range | 20 metres |
| USB Flash Drive | Flash drive capacity MAX 128GB / FAT32 partition |
| USB Player | MP3: Stereo files @ 128k, 192k, 320k and VBR bit rates |
| Front panel line input | TRS 3.5mm unbalanced jack (0.3V level, impedance 10K, internal mono sum) |
| Rear panel line input | JST3 balanced (0.5V level, impedance 10K, mono input) |
| Rear Panel line output | JST3 balanced (0.5V level, impedance 600ohms, mono output) |
| PoE line output | RJ45  balanced (0.5V level, impedance 600ohms, mono output) |
| Product Dimensions (H x W x D) | 76 x 118 x 32 mm (Clipsal 2000 series style mounting) |
| Product Weight | 100 grams |
| Shipping Dimensions (H x W x D) | 255 x 200 x 70 mm |
| Shipping Weight | 660 grams |
| Included Accessories | PoE power supply , Line in and out cable, RJ45 line cable |

*Description and specifications are correct at time of printing. May be subject to change without notice.*